

Valvcon™ electric valve actuators

Series LCR

Features

Valvcon LCR-Series electric actuator is a proven performer for on/off (open/close) valve and damper control. Combining low cost with an extremely high cycle life, the LCR-Series actuators are a truly cost-effective, reliable solution to your simple valve actuation needs.

Easy to install, with no ongoing maintenance required, LCR-Series actuators are ideally suited for OEM applications. They are designed to supply years of trouble-free actuation.



Efficient, consistent performance

A powerful split phase reversing AC motor drives the LCR to produce breakaway torque from 150 to 600 in-lbs. DC motors are also available.

The design of the Valvcon™ LCR actuator makes it one of the most cost-effective units on the market today. And because Valvcon electric actuators are reliable and inherently low maintenance units (compared with pneumatic alternatives), you'll realize long-term efficiencies beyond the initial low price.

All LCR-Series actuators include a visual position indicator and a holding brake to prevent back driving in butterfly valve, damper and resilient-seated ball valve applications.

Strength in design and engineering

Inside the LCR actuator you'll find a terminal strip with 12 wiring locations. The simplicity of design provides greater accessibility and actually makes wiring installation easier. The hardened steel spur gear drive train is remarkably efficient, resulting in consistent performance and long life in on/off applications. The manual override is declutchable for positive override ability. And an absolute position indicator is located on the shaft for easy reading. The LCR cover is manufactured from an extremely strong PVC composite material that is resistant to damage and ultraviolet radiation. The enclosure is weatherproof and features a standard ISO-5211 mounting configuration. The low-profile design and direct drive male output make the LCR perfect for applications within limited space environments. We also provide a full two year warranty on all mechanical components.

The future of valve actuation

Find out why we are looking toward the future by setting new performance standards in the electric valve actuator industry. We would like to become a part of your future. For more details, contact your representative.

LCR options

Order code H – tropical heater/thermostat

The tropical heater and thermostat option is a chassis-mount resistance heater which contacts the motor support plate. It is wired into the existing 12-position terminal block and is recommended in humid environments and those that experience wide temperature swings in order to evaporate any condensation. The thermostat is pre-set to activate at 90°F, (32°C) and deactivate at 110°F, (43°C). The heaters draw approximately 15 watts at all voltages.

Order code L – female output

LCR-Series actuators with the L option are equipped with a 14mm female square output drive instead of the standard male square output drive. The female drive option allows for direct mounting to some valves (see dimensions for further information).

Order code S2 – auxiliary limit switches

Two extra switches may be added to LCR-Series actuators to provide dry contacts; they are fully adjustable to trip at any position. The switches are often used for position indication or to interlock other devices (such as in sequencing operations). The switches are single pole, double throw switches rated for 1/2 HP, 11 amps @250VAC, CSA certified. Auxiliary switch kit P/N 9000LR is universal to all LCR-Series.

Order code T – heater/thermostat


The heater and thermostat option is a chassis-mount resistance heater which contacts the motor support plate. It is wired into the existing 12-position terminal block and is required in installations where the ambient temperatures drop below 32°F, (0°C). The thermostat is pre-set to activate at 40°F, (4°C) and deactivate at 60°F, (15°C). The heaters draw approximately 15 watts at all voltages.

Specifications


| Actuator model | Breakaway torque | Voltage | Duty cycle | Speed seconds (90°) | AMPS - running | | | Approx. weight |
|----------------|----------------------------|---------------------------------|------------|---------------------|----------------|--------|--------|----------------|
| | | | | | 24VAC | 115VAC | 230VAC | |
| LCR150 | 150 lb-in; 12 lb-ft; 17 Nm | 24VAC 115VAC or 230VAC | 25% | 7 | 2.5 | 0.9 | 0.5 | 7 lb / 3 kg |
| LCR300 | 300 lb-in; 25 lb-ft; 34 Nm | | | 14 | 2.8 | 0.9 | 0.5 | |
| LCR600 | 600 lb-in; 50 lb-ft; 68 Nm | | | 21 | 2.5 | 0.9 | 0.5 | |
| | | | | | AMPS - running | | | |
| | | | | | 12VDC | 24VDC | | |
| LCR150 | 150 lb-in; 12 lb-ft; 17 Nm | 12VDC or 24VDC | 80% | 6 | 2.0 | 1.0 | | |
| LCR300 | 300 lb-in; 25 lb-ft; 34 Nm | | | 6 | 2.0 | 1.0 | | |
| LCR600 | 600 lb-in; 50 lb-ft; 68 Nm | | | 15 | 2.0 | 1.9 | | |

| LCR options: | Temperature limits: | | |
|---|------------------------|---|--|
| H - Tropical Heater/Thermostat; L - Female Output; S2 - Two Additional Limit Switches; T - Heater and Thermostat | (all models) | -40°F (-40°C) (with heater and thermostat) to 150°F (66°C) (max.) | Override: Standard, Zinc plated steel |
| | Lubrication: | Permanently lubricated gear train and bearings | Output Shaft: Male, Zinc plated steel Female (optional) |
| | Conduit Connection: | 1/2" - 14 NPT | Cover: Composite, PVC |
| | Declutchable Override: | Standard | Base: Diecast Zinc alloy |
| | | | Enclosure: Designed for NEMA 4/4X |
| | | | Finish: Powder coated epoxy |


LCR DIMENSIONS – MALE

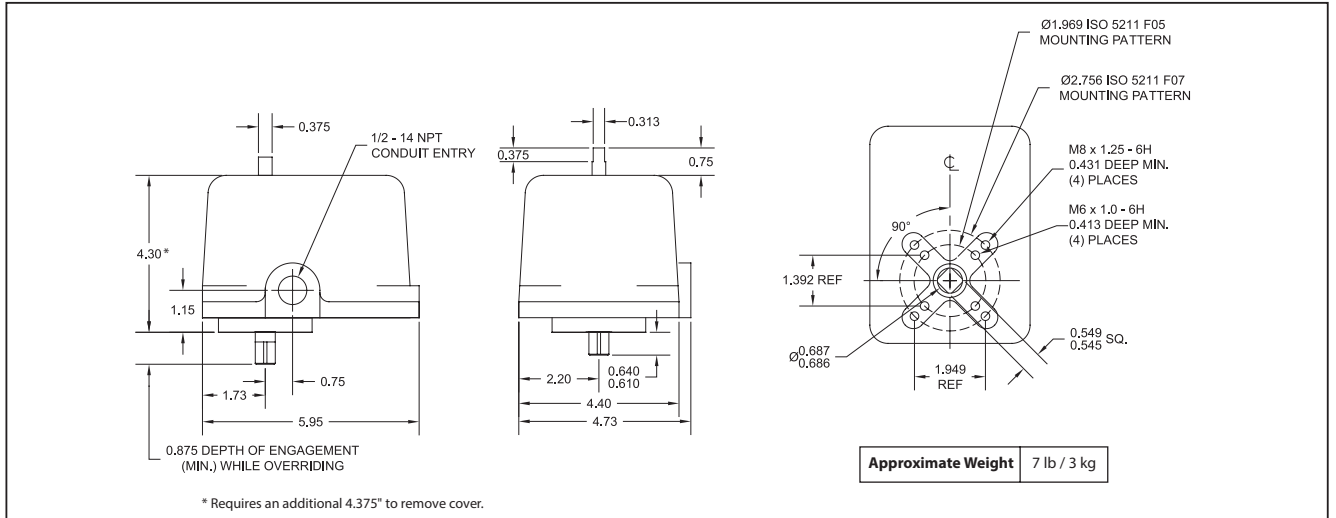


LCR DIMENSIONS – FEMALE

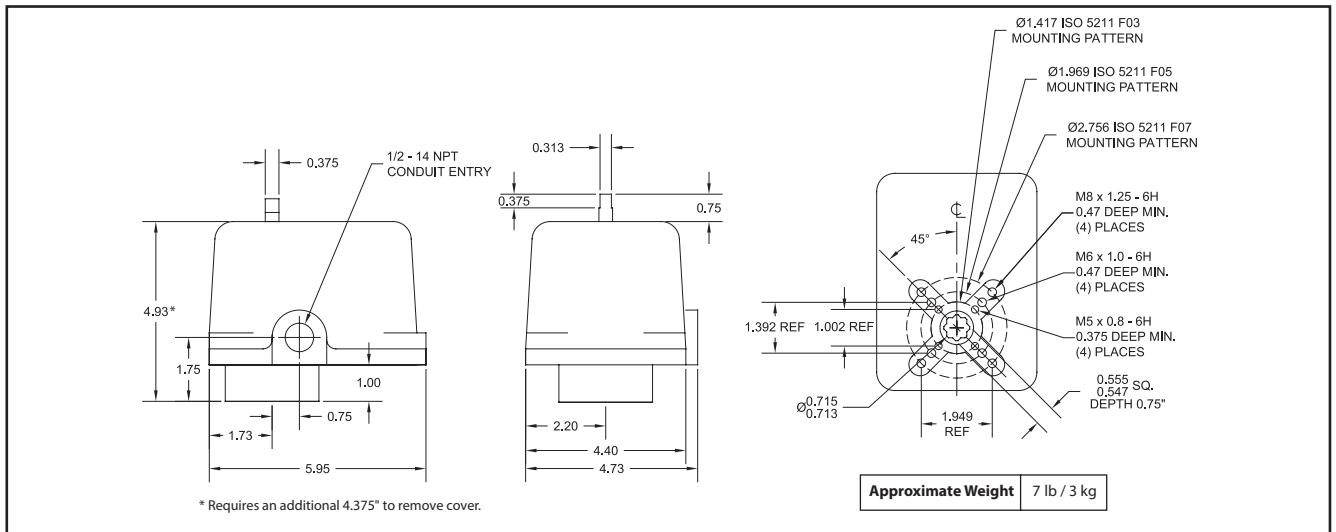

LCR WIRING – DC

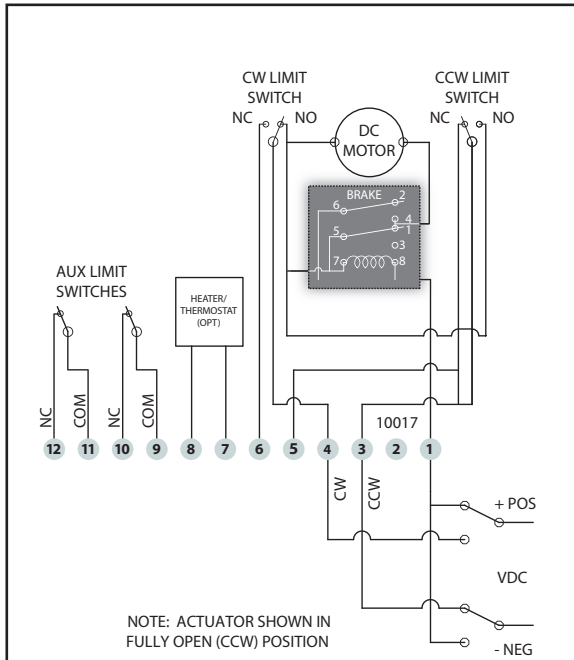

LCR WIRING – AC

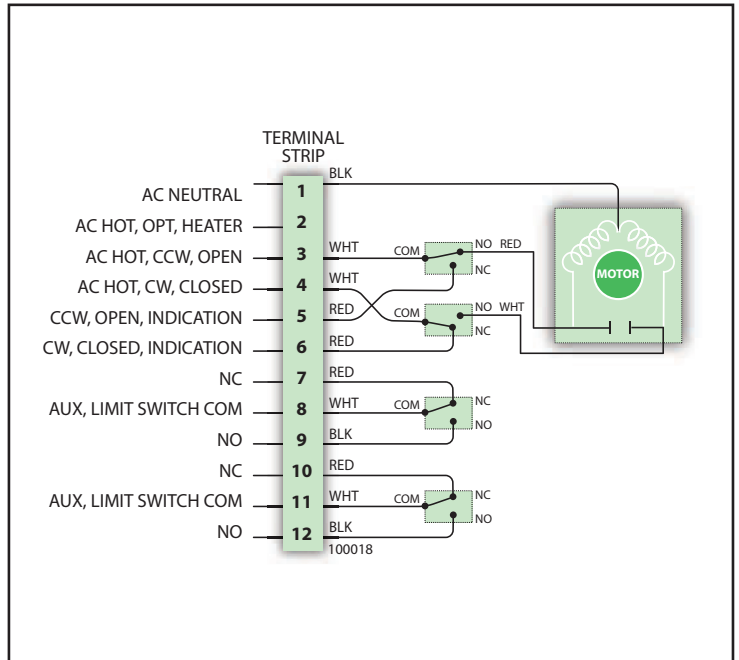

WARNING: As the use of the actuator is application specific, a number of factors should be taken into account when selecting an actuator for a given application. Therefore, some of the applications in which the actuators are used are outside the scope of this document. If you have questions concerning the use, application or compatibility of the actuator with the intended service, contact Valmet for more information.

How to order - LCR-series electric actuators

Example:

Sample model code: LCR300LS2TS24AC

| 1 | 2 | 3 | 4 |
|-----|-----|------|-------|
| LCR | 300 | LS2T | S24AC |

| 1 | Series |
|-----|--------|
| LCR | LCR |

| 2 | Torque |
|-----|---------------------------|
| 150 | 150 lb-in 12 lb-ft; 17 Nm |
| 300 | 300 lb-in 25 lb-ft; 34 Nm |
| 600 | 600 lb-in 50 lb-ft; 68 Nm |

| 3 | Options |
|----------------|------------------------------|
| — | No entry if standard |
| H ¹ | Tropical Heater/Thermostat |
| L ² | Female Output |
| S2 | Two Auxiliary Limit Switches |
| T ³ | Heater/Thermostat |

| 4 | Operating Voltage |
|--------|-------------------|
| S115AC | 115VAC |
| S230AC | 230VAC |
| S24AC | 24VAC |
| S12DC | 12VDC |
| S24DC | 24VDC |

Notes:

1. This heater option activates at or below 90°F, (32°C) and deactivates at 110°F, (43°C); it is recommended in high-humidity applications.
2. LCR-Series actuators with L option are supplied with a 14mm female double square output (note that the standard output is a 14mm male square).
3. This heater option activates at or below 40°F, (4°C) and deactivates at 60°, (15°C); it is recommended in applications where the temperature may drop below 32°F, (0°C).

Committed to customer service, quality & support

Committed to customer service

Our worldwide web site: [www.neles.com/products/ actuators/ electric-actuators/](http://www.neles.com/products/actuators/electric-actuators/), provides 24 hour a day access to all technical support material-from sales brochures to instruction manuals to installation and troubleshooting tips. For local support, our network of trained stocking distributors/representatives are industry leading experts in valve automation. Contact the Valvcon product web site to locate the nearest stocking distributor/ representative.

Timely technical support

Our Product Support is on call to answer your engineering or application questions, and to quickly repair or upgrade your actuators. These highly trained support engineers offer a broad range of expertise, with the combined experience to assist specifying engineers and contractors with information on feasibility and special applications.

Subject to change without prior notice.

Neles, Neles Easyflow, Jamesbury, Stonel, Valvcon and Flowrox, and certain other trademarks, are either registered trademarks or trademarks of Valmet Oyj or its subsidiaries in the United States and/or in other countries.

For more information www.neles.com/trademarks

Valmet Flow Control Oy

Vanha Porvoontie 229, 01380 Vantaa, Finland.

Tel. +358 10 417 5000.

www.valmet.com/flowcontrol

A tradition of quality

We are dedicated to producing superior-quality products that are second to none. Our development laboratory and manufacturing facilities exemplify our total commitment to producing quality products.

